


# FLAILMOWER FM 16-18 PARK



## STRONG ARGUMENTS:

- Double spiral-rotor
- Rubber flap kit – front and rear
- 360° rotating support wheels
- Skids
- Variable height adjustment



**The GreenTec Flailmower FM is constructed specially to be front-mounted on smaller compact tractors. The double-spiral rotor with specialty flails will deliver a perfect cut where the quality is equal to reel mowers.**

## VERSATILE USE:

- Parks
- Residential areas
- Sports fields
- Green areas
- Municipal areas
- Communal areas



 **GREENTEC**

Cutting Edge Technology





## PERFECT CUTTING RESULT WITH VERY LOW POWER REQUIREMENTS




### STANDARD EQUIPMENT

- Produced in high-strength steel
- Rubber flap kit, front and rear
- Due to the housing shape and the double spiral rotor, an enhanced mulch quality is achieved
- Very good ground adjustment with even cut pattern
- 360° rotatable support wheels
- Dynamic balanced spiral rotor

### DOUBLE SPIRAL-ROTOR:

- Better comminution
- Less power requirements
- Uniform and even cut
- Uniform rotor-load
- Higher forward speed
- Lower maintenance costs
- Perfect distribution of the cut material

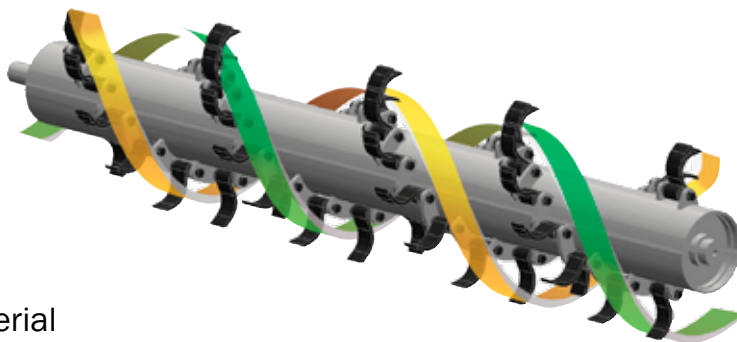

FLAILMOWER	HYDRAULIC		MECHANICAL	
	FM 16 Park	FM 18 Park	FM 16 Park	FM 18 Park
Working width	1.6 m	1.8 m	1.6 m	1.8 m
Transport width	1.8 m	2.0 m	1.8 m	2.0 m
Oil flow at 180 bar	32 l/min	40 l/min	-	-
Power requirement	-	-	25 hp	35 hp
Drive	Hydraulic	Hydraulic	Mechanical	Mechanical
Weight	220 kg	240 kg	220 kg	240 kg

# GREENTEC

Merkurvej 25 | DK-6000 Kolding | Tel: +45 75 55 36 44  
 info@GreenTec.eu | www.GreenTec.eu

Cutting Edge Technology

Dealer:

We reserve the rights to make technical changes

Ver. 2.0-UK\_0117